




www.flex-ing.com

COMPOSITE MANHOLE

2828 Fallon Drive
 Sherman, Texas 75090
 Phone: 1.800.333.3599 / 1.903.892.8983
 Fax: 1.800.765.4801 / 1.903.893.9576



FLEX-ING composite manhole lids offer a light weight alternative to steel manhole lids and are designed to provide solid construction, strong features and secure installation. We don't compromise with cheap wood or foam fillers and each ring and skirt comes standard with the exclusive **ArmorFLEX™** powder coat finish for extreme protection and durability.

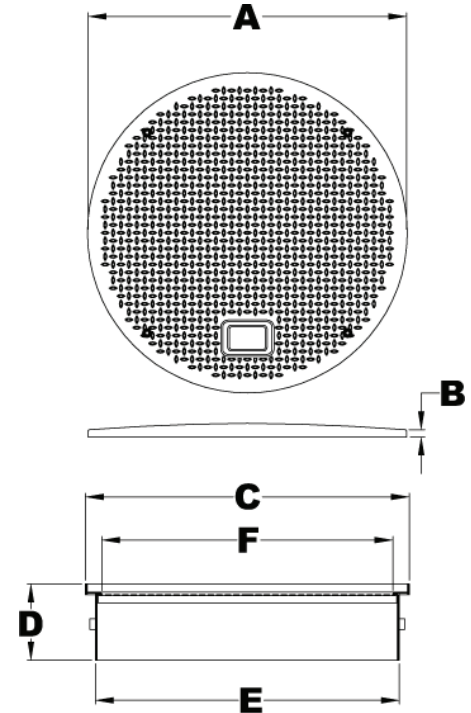

Part Number	Description
19U-128192	8" Composite manhole lid, ring, and skirt
14U-1210	12" Composite manhole lid, ring, and 10" skirt
14URT-1210	12" Raintight Composite manhole lid, ring, and 10" skirt
14U-1210C	12" Composite manhole lid only
14U-RT12KIT	Raintight Kit (Gasket & Bolts) for 12" Lid
14U-2010	20" Composite manhole lid, ring, and 10" skirt
14URT-2010	20" Raintight Composite manhole lid, ring, and 10" skirt
14U-2010C	20" Composite manhole lid only
14U-RT20KIT	Raintight Kit (Gasket & Bolts) for 20" Lid
14U-2410	24" Composite manhole lid, ring, and 10" skirt
14URT-2410	24" Raintight Composite manhole lid, ring, and 10" skirt
14U-2410C	24" Composite manhole lid only
14U-3810	38" Composite manhole lid, ring, and 10" skirt
14URT-3810	38" Raintight Composite manhole lid, ring, and 10" skirt
14U-RT3810CL	38" Raintight Composite manhole with 10" skirt and cam locks
14U-3810C	38" Composite manhole lid only
14U-RT38KIT	Raintight Kit (Gasket & Bolts) for 38" Lid
14U-4210	42" Composite manhole lid, ring, and skirt (10")
14URT-4210	42" Raintight Composite manhole lid, ring, and skirt (10")
14U-RT4210CL	42" Raintight Composite manhole with skirt (10") and cam locks
14U-4210C	42" Composite manhole lid only
14U-RT42KIT	Raintight Kit (Gasket & Bolts) for 42" lid

Features:

- Light enough for one person to handle
- Slip resistant
- Exceeds H20 and HS20 standards*
- Exceeds EN124:1994**
- Minimal deflection
- Non rotational tabs
- Rain tight - bolt down and cam lock available
- Custom sizes and styles available

* 32,000 lbs. or 16,000 for each set of dual tire wheels.
 **Exceeds the EN124:1994 standard — 18,827 lbs.

		Cover Size					
		42"	38"	24"	20"	12"	8"
Dimensions	A	43.94"	39.00"	25.63"	20.00"	13.00"	7.75"
	B	1.00"*	1.00"*	0.75"	0.75"	0.75"	0.75"
	C	44.50"	39.75"	26.63"	20.63"	13.75"	8.50"
	D	10.50"	10.50"	10.50"	10.50"	10.50"	10.50"
	E	42.00"	37.00"	23.50"	17.50"	10.63"	6.50"
	F	41.25"	35.25"	23.13"	17.13"	10.25"	6.50"

*Center of lid thickness is 1.25"